
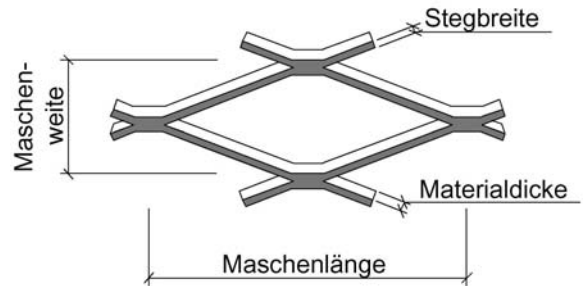


VESMETAL

Masche: (R) 8 x 4

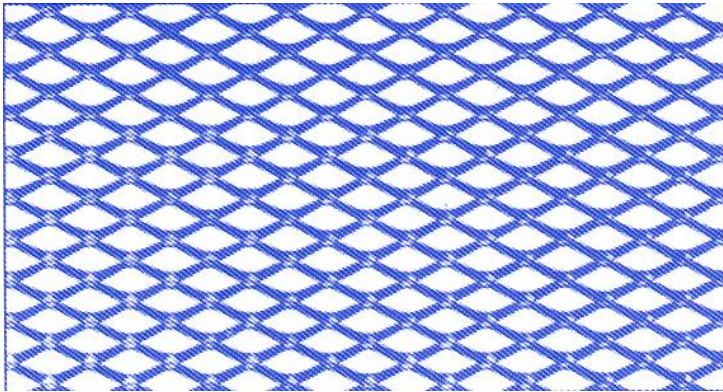

aus Stahlblech (Materialdicke: 0,3 - 1,0mm / max. Tafelbreite: 1000mm)

| Kurzbezeichnung Bestell-Nr. | Maschen- länge mm L | Maschen- weite mm W (±5%) | Stegbreite mm B (±5%) | Material- dicke mm A (±10%) | Streckgitter- dicke mm D | Streckgitterbreiten (max.) ± 10% | | freier Quer- schnitt | Gewicht Kg/m ² ≙ |
|--------------------------------|---------------------------|---------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------------|------|----------------------------|-----------------------------------|
| | | | | | | 600 | 1000 | | |
| 080/1503 | 8 | 4 | 1,5 | 0,3 | | X | X | 25% | 1,80 |
| 080/1504 | 8 | 4 | 1,5 | 0,4 | | X | X | 25% | 2,39 |
| 080/0505 | 8 | 4 | 0,5 | 0,5 | 0,9 | X | X | 75% | 1,00 |
| 080/0806 | 8 | 4 | 0,8 | 0,6 | 1,2 | X | X | 60% | 1,92 |
| 080/1008 | 8 | 4 | 1,0 | 0,8 | 1,7 | X | X | 50% | 3,20 |
| 080/1210 | 8 | 4 | 1,2 | 1,0 | 2,1 | X | X | 40% | 4,80 |
| 080/1510 | 8 | 4 | 1,5 | 1,0 | | X | X | 25% | 5,98 |

aus Aluminium (Materialdicke: 0,3 - 1,5mm / max. Tafelbreite: 1000mm)

| Kurzbezeichnung Bestell-Nr. | Maschen- länge mm L | Maschen- weite mm W (±5%) | Stegbreite mm B (±5%) | Material- dicke mm A (±10%) | Streckgitter- dicke mm D | Streckgitterbreiten (max.) ± 10% | | freier Quer- schnitt | Gewicht Kg/m ² ≙ |
|--------------------------------|---------------------------|---------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------------|------|----------------------------|-----------------------------------|
| | | | | | | 600 | 1000 | | |
| 080/1503 | 8 | 4 | 1,5 | 0,3 | | X | X | 25% | 0,61 |
| 080/1504 | 8 | 4 | 1,5 | 0,4 | | X | X | 25% | 0,81 |
| 080/0505 | 8 | 4 | 0,5 | 0,5 | 0,9 | X | X | 75% | 0,34 |
| 080/0806 | 8 | 4 | 0,8 | 0,6 | 1,2 | X | X | 60% | 0,65 |
| 080/1008 | 8 | 4 | 1,0 | 0,8 | 1,7 | X | X | 50% | 1,08 |
| 080/1210 | 8 | 4 | 1,2 | 1,0 | 2,1 | X | X | 40% | 1,62 |
| 080/1510 | 8 | 4 | 1,5 | 1,0 | | X | X | 25% | 2,02 |
| 080/1515 | 8 | 4 | 1,5 | 1,5 | | X | X | 25% | 3,03 |

aus Edelstahl 1.4301 (Materialdicke: 0,3 - 1,0mm / max. Tafelbreite: 1000mm)

| Kurzbezeichnung Bestell-Nr. | Maschen- länge mm L | Maschen- weite mm W (±5%) | Stegbreite mm B (±5%) | Material- dicke mm A (±10%) | Streckgitter- dicke mm D | Streckgitterbreiten (max.) ± 10% | | freier Quer- schnitt | Gewicht Kg/m ² ≙ |
|--------------------------------|---------------------------|---------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------------|------|----------------------------|-----------------------------------|
| | | | | | | 600 | 1000 | | |
| 080/1503 | 8 | 4 | 1,5 | 0,3 | | X | X | 25% | 1,80 |
| 080/1504 | 8 | 4 | 1,5 | 0,4 | | X | X | 25% | 2,39 |
| 080/0505 | 8 | 4 | 0,5 | 0,5 | 0,9 | X | X | 75% | 1,00 |
| 080/0806 | 8 | 4 | 0,8 | 0,6 | 1,2 | X | X | 60% | 1,92 |
| 080/1008 | 8 | 4 | 1,0 | 0,8 | 1,7 | X | X | 50% | 3,20 |
| 080/1210 | 8 | 4 | 1,2 | 1,0 | 2,1 | X | X | 40% | 4,80 |
| 080/1510 | 8 | 4 | 1,5 | 1,0 | | X | X | 25% | 5,98 |

aus Kupfer (Materialdicke: 0,3 - 1,0mm / max. Tafelbreite: 1000mm)

| Kurzbezeichnung Bestell-Nr. | Maschen- länge mm L | Maschen- weite mm W (±5%) | Stegbreite mm B (±5%) | Material- dicke mm A (±10%) | Streckgitter- dicke mm D | Streckgitterbreiten (max.) ± 10% | | freier Quer- schnitt | Gewicht Kg/m ² ≙ |
|--------------------------------|---------------------------|---------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------------|------|----------------------------|-----------------------------------|
| | | | | | | 600 | 1000 | | |
| 080/1503 | 8 | 4 | 1,5 | 0,3 | | X | X | 25% | 2,00 |
| 080/1504 | 8 | 4 | 1,5 | 0,4 | | X | X | 25% | 2,66 |
| 080/0505 | 8 | 4 | 0,5 | 0,55 | | X | X | 75% | 1,23 |
| 080/0806 | 8 | 4 | 0,8 | 0,6 | 1,2 | X | X | 60% | 2,14 |
| 080/1008 | 8 | 4 | 1,0 | 0,8 | 1,7 | X | X | 50% | 3,56 |
| 080/1210 | 8 | 4 | 1,2 | 1,0 | 2,1 | X | X | 40% | 5,33 |
| 080/1510 | 8 | 4 | 1,5 | 1,0 | | X | X | 25% | 6,65 |

Alle Angaben unter jeglichen Vorbehalt !!!