
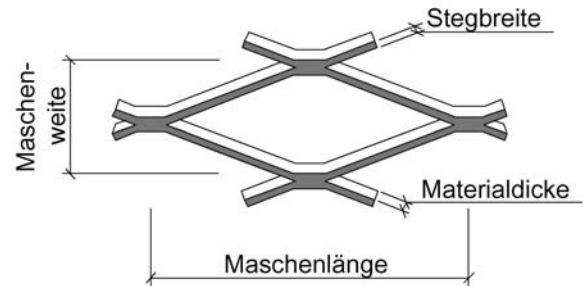


VESMETAL

Masche: (R) 28 x 16

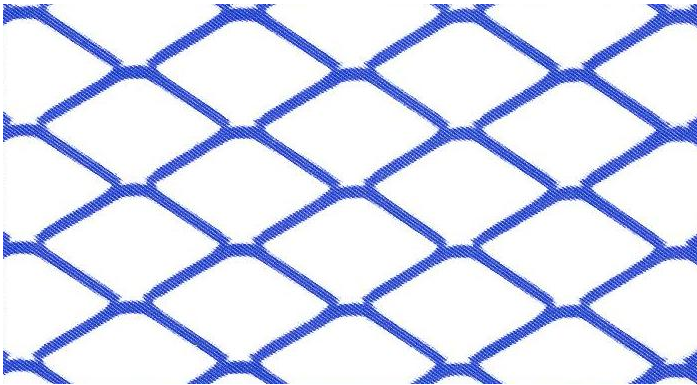

aus Stahlblech (Materialdicke: 0,7 – 2,0mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
2816/1007	28	16	1,5	0,70		X	X	80%	1,12
2816/1210	28	16	1,2	1,00	2,1	X	X	84%	1,28
2816/2010	28	16	2,0	1,00		X	X	73%	2,14
2816/15125	28	16	1,5	1,25	2,7	X	X	80%	2,00
2816/1515	28	16	1,5	1,50	2,7	X	X	80%	2,40
2816/2015	28	16	2,0	1,50	3,6	X	X	73%	3,20
2816/2520	28	16	2,5	2,00		X	X	67%	5,34
2816/3020	28	16	3,0	2,00		X	X	60%	6,40

aus Aluminium (Materialdicke: 0,8 - 3,0mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
2816/1008	28	16	1,5	0,80		X	X	80%	0,44
2816/1210	28	16	1,2	1,00	2,1	X	X	84%	0,44
2816/2010	28	16	2,0	1,00		X	X	73%	0,72
2816/15125	28	16	1,5	1,25	2,7	X	X	80%	0,68
2816/1515	28	16	1,5	1,50	2,7	X	X	80%	0,81
2816/2015	28	16	2,0	1,50	3,6	X	X	73%	1,08
2816/2520	28	16	2,5	2,00		X	X	67%	1,80
2816/3020	28	16	3,0	2,00		X	X	60%	2,16
2816/4030	28	16	4,0	3,00		X	X	47%	4,31

aus Edelstahl 1.4301 (Materialdicke: 0,5 - 1,25mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
2816/1505	28	16	1,5	0,50		X	X	80%	0,8
2816/1508	28	16	1,5	0,80		X	X	80%	1,28
2816/1210	28	16	1,2	1,00	2,1	X	X	84%	1,28
2816/2010	28	16	2,0	1,00		X	X	73%	2,14
2816/15125	28	16	1,5	1,25	2,7	X	X	80%	2,00
2816/15125	28	16	2,5	1,25		X	X	67%	3,34

aus Kupfer (Materialdicke: 0,55 - 1,5mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
2816/15055	28	16	1,5	0,55		X	X	80%	0,98
2816/1508	28	16	1,5	0,80		X	X	80%	1,43
2816/1210	28	16	1,2	1,00	2,1	X	X	84%	1,43
2816/2010	28	16	2,0	1,00		X	X	73%	2,38
2816/15125	28	16	1,5	1,25	2,7	X	X	80%	2,23
2816/2015	28	16	2,0	1,50	3,6	X	X	73%	3,56

Alle Angaben unter jeglichen Vorbehalt !!!