
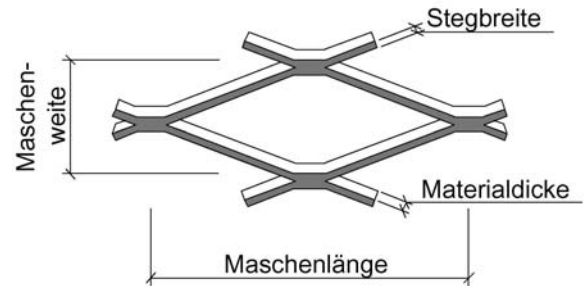


# VESMETAL

## Masche: (R) 30 x 12

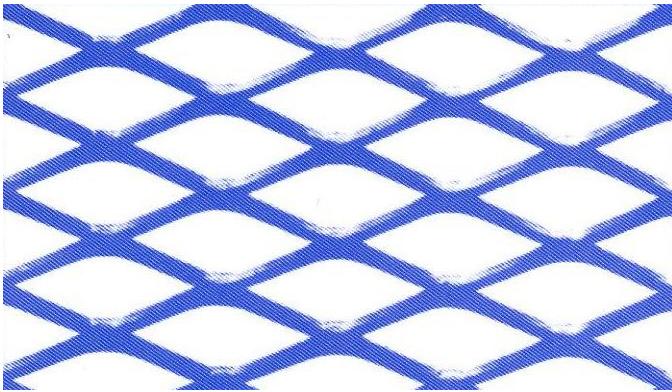

aus Stahlblech (Materialdicke: 0,7 - 2,0mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1000	1250		
3012/1507	30	12	1,5	0,7		X	X	75%	1,40
3012/1510	30	12	1,5	1,0	2,8	X	X	75%	2,00
3012/1515	30	12	1,5	1,5	2,8	X	X	75%	3,00
3012/2015	30	12	2,0	1,5		X	X	67%	4,00
3012/2515	30	12	2,5	1,5		X	X	58%	5,00
3012/2520	30	12	2,5	2,0		X	X	58%	6,67
3012/3020	30	12	3,0	2,0		X	X	50%	8,00

aus Aluminium (Materialdicke: 0,8 – 2,5mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1000	1250		
3012/1508	30	12	1,5	0,8		X	X	75%	0,54
3012/1510	30	12	1,5	1,0	2,8	X	X	75%	0,68
3012/1515	30	12	1,5	1,5	2,8	X	X	75%	1,02
3012/2015	30	12	2,0	1,5		X	X	67%	1,35
3012/2515	30	12	2,5	1,5		X	X	58%	1,69
3012/2520	30	12	2,5	2,0		X	X	58%	2,27
3012/3020	30	12	3,0	2,0		X	X	50%	2,70
3012/3025	30	12	3,0	2,5		X	X	50%	3,38
3012/4025	30	12	4,0	2,5		X	X	33%	4,50

aus Edelstahl 1.4301 (Materialdicke: 0,5 - 1,25mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1000	1250		
3012/1507	30	12	1,5	0,7		X	X	75%	1,40
3012/1510	30	12	1,5	1,0	2,8	X	X	75%	2,00
3012/2510	30	12	2,5	1,0		X	X	58%	3,34
3012/15125	30	12	1,5	1,25		X	X	75%	2,79
3012/20125	30	12	2,0	1,25		X	X	67%	3,34
3012/30125	30	12	3,0	1,25		X	X	50%	5,00

aus Kupfer (Materialdicke: 0,55 - 1,5mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1000	1250		
3012/15055	30	12	1,5	0,55		X	X	75%	1,23
3012/1507	30	12	1,5	0,7		X	X	75%	1,56
3012/1510	30	12	1,5	1,0	2,8	X	X	75%	2,23
3012/1515	30	12	1,5	1,5	2,8	X	X	75%	3,34
3012/2015	30	12	2,0	1,5		X	X	67%	4,45
3012/2515	30	12	2,5	1,5		X	X	58%	5,57

Alle Angaben unter jeglichen Vorbehalt !!!