
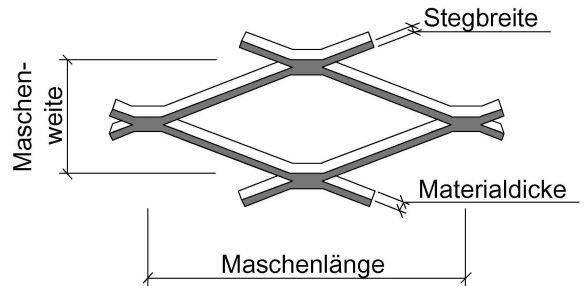


VESMETAL

Masche: (R) 30 x 15

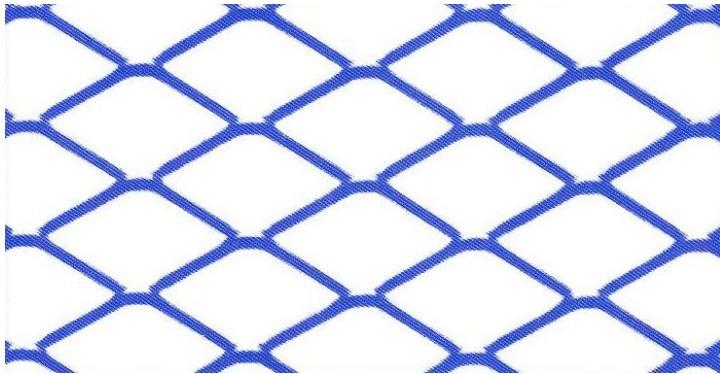

aus Stahlblech (Materialdicke: 0,7 - 2,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
3015/1507	30	15	1,5	0,7		X	X	80%	1,12
3015/1510	30	15	1,5	1,0	2,8	X	X	80%	1,60
3015/15125	30	15	1,5	1,25	2,8	X	X	80%	2,00
3015/2015	30	15	2,0	1,5	3,7	X	X	73%	3,20
3015/2515	30	15	2,5	1,5		X	X	67%	4,00
3015/20175	30	15	2,0	1,75	3,9	X	X	73%	3,74
3015/3020	30	15	3,0	2,0		X	X	60%	6,40

aus Aluminium (Materialdicke: 0,8 – 2,5mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
3015/1507	30	15	1,5	0,7		X	X	80%	0,38
3015/1510	30	15	1,5	1,0	2,8	X	X	80%	0,54
3015/15125	30	15	1,5	1,25	2,8	X	X	80%	0,68
3015/2015	30	15	2,0	1,5	3,7	X	X	73%	1,08
3015/2515	30	15	2,5	1,5		X	X	67%	1,35
3015/20175	30	15	2,0	1,75	3,9	X	X	73%	1,26
3015/3020	30	15	3,0	2,0		X	X	60%	2,16
3015/5020	30	15	5,0	2,0		X	X	33%	3,60
3015/5025	30	15	5,0	2,5		X	X	33%	4,50

aus Edelstahl 1.4301 (Materialdicke: 0,5 - 1,25mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
3015/1507	30	15	1,5	0,7		X	X	80%	1,12
3015/1508	30	15	1,5	0,8		X	X	80%	1,28
3015/1510	30	15	1,5	1,0	2,8	X	X	80%	1,60
3015/2510	30	15	2,5	1,0		X	X	67%	2,67
3015/15125	30	15	1,5	1,25	2,8	X	X	80%	2,00
3015/25125	30	15	2,5	1,25		X	X	67%	3,34

aus Kupfer (Materialdicke: 0,55 - 1,5mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
3015/1507	30	15	1,5	0,7		X	X	80%	1,25
3015/1508	30	15	1,5	0,8		X	X	80%	1,43
3015/1510	30	15	1,5	1,0	2,8	X	X	80%	1,78
3015/2510	30	15	2,5	1,0		X	X	67%	2,97
3015/15125	30	15	1,5	1,25	2,8	X	X	80%	2,23
3015/3020	30	15	3,0	2,0		X	X	60%	7,12

Alle Angaben unter jeglichen Vorbehalt !!!