
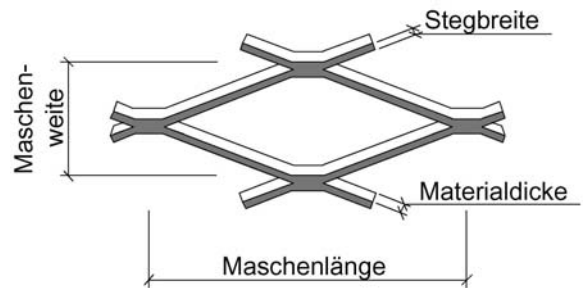


VESMETAL

Masche: (R) 35 x 15

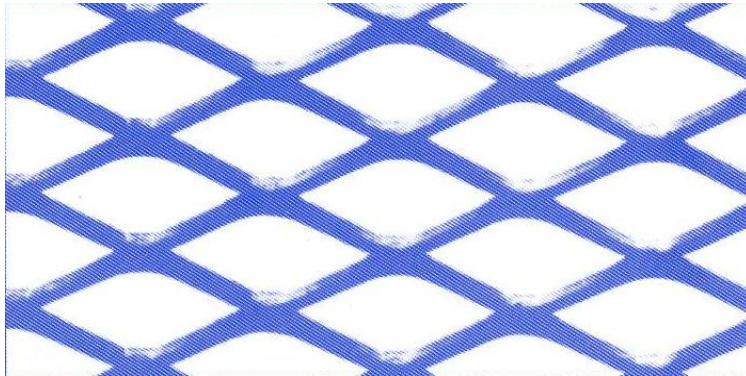

aus Stahlblech (Materialdicke: 0,7 - 2,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
3515/1507	35	15	1,5	0,7		X	X	80%	1,12
3515/1510	35	15	1,5	1,0	2,8	X	X	80%	1,60
3515/17125	35	15	1,7	1,25	2,8	X	X	77%	2,27
3515/2015	35	15	2,0	1,5	3,7	X	X	73%	3,20
3515/2515	35	15	2,5	1,5		X	X	67%	4,00
3515/2520	35	15	2,5	2,0	4,8	X	X	67%	5,34
3515/3020	35	15	3,0	2,0		X	X	60%	6,40

aus Aluminium (Materialdicke: 0,8 – 2,5mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
3515/1508	35	15	1,5	0,8		X	X	80%	0,44
3515/1510	35	15	1,5	1,0	2,8	X	X	80%	0,54
3515/17125	35	15	1,7	1,25	2,8	X	X	77%	0,77
3515/2015	35	15	2,0	1,5	3,7	X	X	73%	1,08
3515/2515	35	15	2,5	1,5		X	X	67%	1,35
3515/2520	35	15	2,5	2,0	4,8	X	X	67%	1,80
3515/3020	35	15	3,0	2,0		X	X	60%	2,16
3515/3025	35	15	3,0	2,5		X	X	60%	2,70
3515/4025	35	15	4,0	2,5		X	X	47%	3,60

aus Edelstahl 1.4301 (Materialdicke: 0,5 - 1,25mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
3515/1505	35	15	1,5	0,5		X	X	80%	0,80
3515/1507	35	15	1,5	0,7		X	X	80%	1,12
3515/1510	35	15	1,5	1,0	2,8	X	X	80%	1,60
3515/17125	35	15	1,7	1,25	2,8	X	X	77%	2,27
3515/20125	35	15	2,0	1,25		X	X	73%	2,67
3515/25125	35	15	2,5	1,25		X	X	67%	3,34

aus Kupfer (Materialdicke: 0,55 - 1,5mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
3515/15055	35	15	1,5	0,55		X	X	80%	0,98
3515/1507	35	15	1,5	0,7		X	X	80%	1,25
3515/1510	35	15	1,5	1,0		X	X	80%	1,78
3515/17125	35	15	1,7	1,25		X	X	77%	2,52
3515/2015	35	15	2,0	1,5		X	X	73%	3,56
3515/2515	35	15	2,5	1,5		X	X	67%	4,45

Alle Angaben unter jeglichen Vorbehalt !!!