
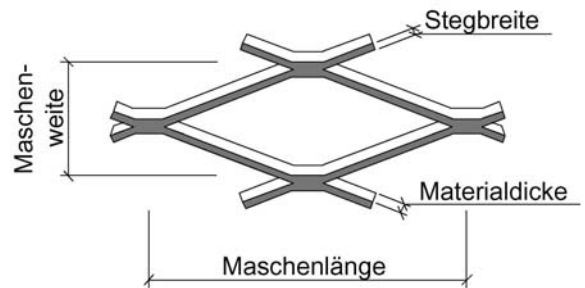


VESMETAL

Masche: (R) 39 x 18

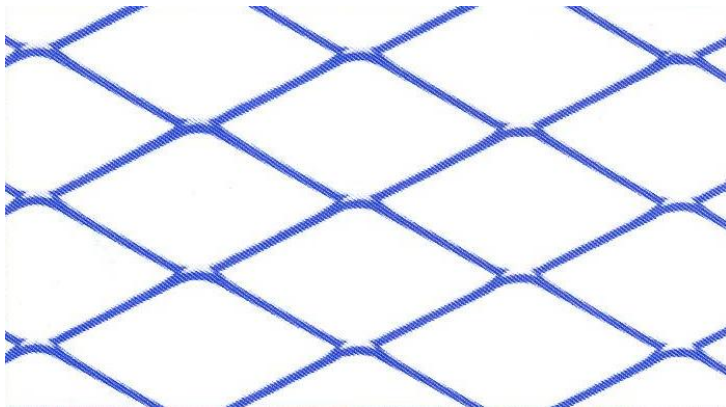

aus Stahlblech (Materialdicke: 1,0 - 4,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
3918/1510	39	18	1,5	1,0	2,5	X	X	83%	1,34
3918/2015	39	18	2,0	1,5	3,0	X	X	78%	2,67
3918/2515	39	18	2,5	1,5		X	X	72%	3,34
3918/3015	39	18	3,0	1,5		X	X	67%	4,00
3918/2520	39	18	2,5	2,0		X	X	72%	4,45
3918/7020	39	18	7,0	2,0		X	X	23%	12,41
3918/3030	39	18	3,0	3,0	5,0	X	X	67%	8,00
3918/5030	39	18	5,0	3,0		X	X	44%	13,34
3918/5040	39	18	5,0	4,0	8,5	X	X	44%	17,78

aus Aluminium (Materialdicke: 1,0 - 5,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
3918/1510	39	18	1,5	1,0	2,5	X	X	83%	0,45
3918/2015	39	18	2,0	1,5	3,0	X	X	78%	0,90
3918/2515	39	18	2,5	1,5		X	X	72%	1,13
3918/3015	39	18	3,0	1,5		X	X	67%	1,35
3918/2520	39	18	2,5	2,0		X	X	72%	4,45
3918/7020	39	18	7,0	2,0		X	X	23%	4,19
3918/3030	39	18	3,0	3,0	5,0	X	X	67%	2,70
3918/5030	39	18	5,0	3,0		X	X	44%	4,50
3918/5040	39	18	5,0	4,0	8,5	X	X	44%	6,00
3918/7050	39	18	7,0	5,0		X	X	23%	10,47

aus Edelstahl 1.4301 (Materialdicke: 0,8 – 2,5mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
3918/1510	39	18	1,5	1,0	2,5	X	X	83%	1,34
3918/2015	39	18	2,0	1,5	3,0	X	X	78%	2,67
3918/2515	39	18	2,5	1,5		X	X	72%	3,34
3918/2520	39	18	2,5	2,0		X	X	72%	4,45

aus Kupfer (Materialdicke: 0,55 – 2,5mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
3918/15055	39	18	1,5	0,55		X	X	83%	0,82
3918/1510	39	18	1,5	1,0	2,5	X	X	83%	1,49
3918/2015	39	18	2,0	1,5	3,0	X	X	78%	2,97
3918/2515	39	18	2,5	1,5		X	X	72%	3,71
3918/2520	39	18	2,5	2,0		X	X	72%	4,95
3918/3030	39	18	3,0	3,0	5,0	X	X	67%	8,90

Alle Angaben unter jeglichen Vorbehalt !!!