
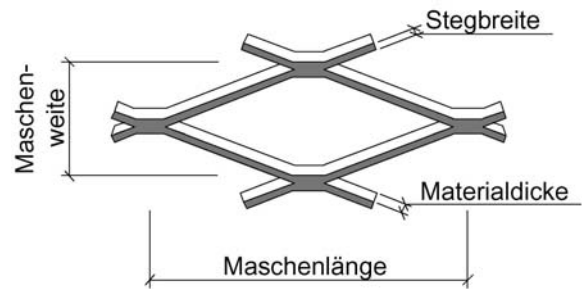


VESMETAL

Masche: (R) 42 x 12

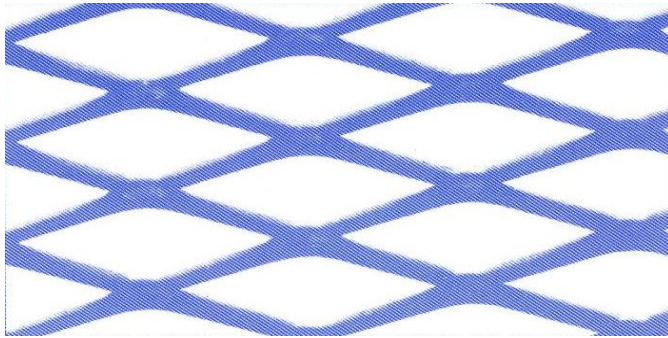

aus Stahlblech (Materialdicke: 0,7 - 3,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	2500		
4212/1507	42	12	1,5	0,70		X	X	75%	1,40
4212/2510	42	12	2,5	1,00	4,5	X	X	58%	3,38
4212/17125	42	12	1,7	1,25		X	X	72%	2,84
4212/2015	42	12	2,0	1,50	5,0	X	X	67%	4,00
4212/2515	42	12	2,5	1,50		X	X	58%	5,00
4212/2520	42	12	2,5	2,00		X	X	58%	6,67
4212/3020	42	12	3,0	2,00		X	X	50%	8,00
4212/5030	42	12	5,0	3,00		X	X	17%	20,00

aus Aluminium (Materialdicke: 1,0 - 4,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	2500		
4212/1510	42	12	1,5	1,00		X	X	75%	0,68
4212/2510	42	12	2,5	1,00	4,5	X	X	58%	1,13
4212/17125	42	12	1,7	1,25		X	X	72%	0,96
4212/2015	42	12	2,0	1,50	5,0	X	X	67%	1,35
4212/2515	42	12	2,5	1,50		X	X	58%	1,69
4212/2520	42	12	2,5	2,00		X	X	58%	2,25
4212/3020	42	12	3,0	2,00		X	X	50%	2,70
4212/5030	42	12	5,0	3,00		X	X	17%	6,75
4212/4040	42	12	4,0	4,00		X	X	33%	7,20
4212/5040	42	12	5,0	4,00		X	X	17%	9,0

aus Edelstahl 1.4301 (Materialdicke: 0,7 – 2,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	2500		
4212/1507	42	12	1,5	0,70		X	X	75%	1,40
4212/2510	42	12	2,5	1,00	4,5	X	X	58%	3,38
4212/2015	42	12	2,0	1,50	5,0	X	X	67%	4,00
4212/3020	42	12	3,0	2,00		X	X	58%	6,67

aus Kupfer (Materialdicke: 0,55 – 2,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	2500		
4212/15055	42	12	1,5	0,55		X	X	75%	1,23
4212/2510	42	12	2,5	1,00	4,5	X	X	58%	3,71
4212/2015	42	12	2,0	1,50	5,0	X	X	67%	4,45
4212/2520	42	12	2,5	2,00		X	X	58%	7,42
4212/3020	42	12	3,0	2,00		X	X	50%	8,90
4212/4020	42	12	4,0	2,00		X	X	33%	11,90

Alle Angaben unter jeglichen Vorbehalt !!!