
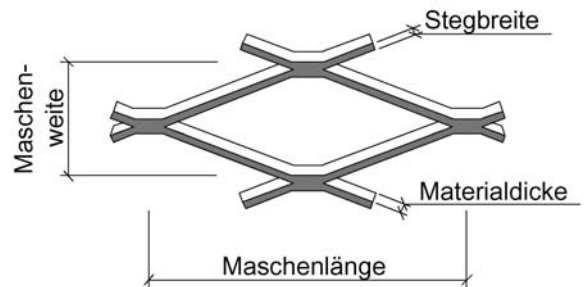


# VESMETAL

## Masche: (R) 42 x 16

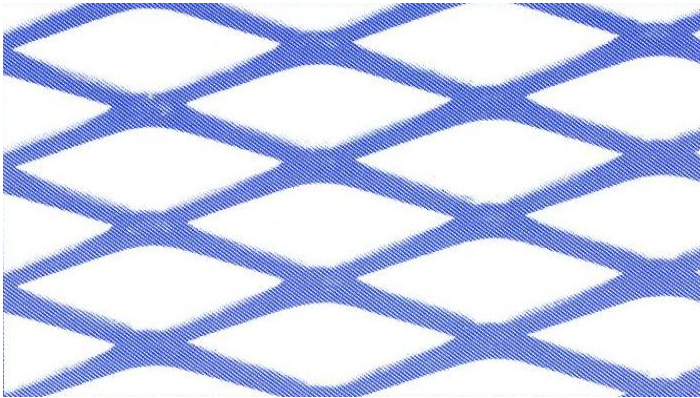

### aus Stahlblech (Materialdicke: 0,8 - 3,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2000		
4216/1508	42	16	1,5	0,80		X	X	81%	1,20
4216/1510	42	16	1,5	1,00		X	X	81%	1,50
4216/17125	42	16	1,7	1,25		X	X	79%	2,13
4216/2015	42	16	2,0	1,50		X	X	75%	3,00
4216/2515	42	16	2,5	1,50		X	X	69%	3,75
4216/2520	42	16	2,5	2,00		X	X	69%	5,00
4216/3020	42	16	3,0	2,00		X	X	63%	6,00
4216/5030	42	16	5,0	3,00		X	X	38%	15,00

### aus Aluminium (Materialdicke: 1,0 - 4,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2000		
4216/1510	42	16	1,5	1,00		X	X	81%	0,51
4216/17125	42	16	1,7	1,25		X	X	79%	0,72
4216/2015	42	16	2,0	1,50		X	X	75%	1,02
4216/2515	42	16	2,5	1,50		X	X	69%	1,27
4216/2520	42	16	2,5	2,00		X	X	69%	1,69
4216/3020	42	16	3,0	2,00		X	X	63%	2,03
4216/5020	42	16	5,0	2,00		X	X	38%	3,38
4216/9020	42	16	5,0	2,50		X	X	38%	4,22
4216/5030	42	16	5,0	3,00		X	X	38%	5,07
4216/6040	42	16	6,0	4,00		X	X	25%	8,06

### aus Edelstahl 1.4301 (Materialdicke: 0,8 – 2,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2000		
4216/1508	42	16	1,5	0,80		X	X	81%	1,20
4216/17125	42	16	1,7	1,25		X	X	79%	2,13
4216/2015	42	16	2,0	1,50		X	X	75%	3,00
4216/2520	42	16	2,5	2,00		X	X	69%	5,00

### aus Kupfer (Materialdicke: 0,55 – 3,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2000		
4216/15055	42	16	1,5	0,55		X	X	81%	0,92
4216/20055	42	16	2,0	0,55		X	X	75%	1,23
4216/17125	42	16	1,7	1,25		X	X	79%	2,37
4216/2015	42	16	2,0	1,50		X	X	75%	3,34
4216/2520	42	16	2,5	2,00		X	X	69%	5,57
4216/3030	42	16	3,0	3,00		X	X	63%	10,00

Alle Angaben unter jeglichen Vorbehalt !!!