
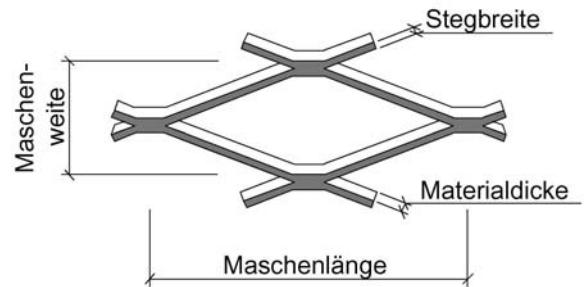


VESMETAL

Masche: (R) 90 x 40

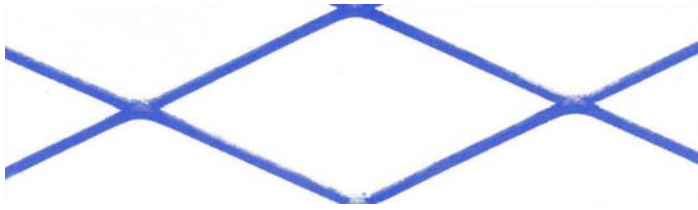

aus Stahlblech (Materialdicke: 1,0 - 4,0mm / max. Tafelbreite: 2500mm)

| Kurzbezeichnung Bestell-Nr. | Maschen- länge mm L | Maschen- weite mm W (±5%) | Stegbreite mm B (±5%) | Material- dicke mm A (±10%) | Streckgitter- dicke mm D | Streckgitterbreiten (max.) ± 10% | | freier Quer- schnitt | Gewicht Kg/m ² ≙ |
|--------------------------------|---------------------------|---------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------------|------|----------------------------|-----------------------------------|
| | | | | | | 1250 | 2500 | | |
| 9040/1510 | 90 | 40 | 1,5 | 1,0 | | X | X | 93% | 0,60 |
| 9040/4040 | 90 | 40 | 4,0 | 1,0 | | X | X | 80% | 1,60 |
| 9040/8010 | 90 | 40 | 8,0 | 1,0 | | X | X | 60% | 3,20 |
| 9040/2015 | 90 | 40 | 2,0 | 1,5 | 3,60 | X | X | 90% | 1,20 |
| 9040/3020 | 90 | 40 | 3,0 | 2,0 | 5,70 | X | X | 85% | 2,40 |
| 9040/3025 | 90 | 40 | 3,0 | 2,5 | | X | X | 85% | 3,00 |
| 9040/4030 | 90 | 40 | 4,0 | 3,0 | 7,70 | X | X | 80% | 4,80 |
| 9040/5040 | 90 | 40 | 5,0 | 4,0 | 9,80 | X | X | 75% | 8,00 |
| 9040/1040 | 90 | 40 | 10,0 | 4,0 | | X | X | 50% | 16,00 |

aus Aluminium (Materialdicke: 1,0 - 5,0mm / max. Tafelbreite: 2500mm)

| Kurzbezeichnung Bestell-Nr. | Maschen- länge mm L | Maschen- weite mm W (±5%) | Stegbreite mm B (±5%) | Material- dicke mm A (±10%) | Streckgitter- dicke mm D | Streckgitterbreiten (max.) ± 10% | | freier Quer- schnitt | Gewicht Kg/m ² ≙ |
|--------------------------------|---------------------------|---------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------------|------|----------------------------|-----------------------------------|
| | | | | | | 1250 | 2500 | | |
| 9040/1510 | 90 | 40 | 1,5 | 1,0 | | X | X | 93% | 0,21 |
| 9040/4010 | 90 | 40 | 4,0 | 1,0 | | X | X | 80% | 0,54 |
| 9040/8010 | 90 | 40 | 8,0 | 1,0 | | X | X | 60% | 1,08 |
| 9040/2015 | 90 | 40 | 2,0 | 1,5 | 3,60 | X | X | 90% | 0,41 |
| 9040/3020 | 90 | 40 | 3,0 | 2,0 | 5,70 | X | X | 85% | 0,81 |
| 9040/3025 | 90 | 40 | 3,0 | 2,5 | | X | X | 85% | 1,02 |
| 9040/4030 | 90 | 40 | 4,0 | 3,0 | 7,70 | X | X | 80% | 1,62 |
| 9040/5040 | 90 | 40 | 5,0 | 4,0 | 9,80 | X | X | 75% | 2,70 |
| 9040/1040 | 90 | 40 | 10,0 | 4,0 | | X | X | 50% | 5,40 |
| 9040/0950 | 90 | 40 | 9,0 | 5,0 | | X | X | 55% | 6,06 |

aus Edelstahl 1.4301 (Materialdicke: 1,0 – 3,0mm / max. Tafelbreite: 2500mm)

| Kurzbezeichnung Bestell-Nr. | Maschen- länge mm L | Maschen- weite mm W (±5%) | Stegbreite mm B (±5%) | Material- dicke mm A (±10%) | Streckgitter- dicke mm D | Streckgitterbreiten (max.) ± 10% | | freier Quer- schnitt | Gewicht Kg/m ² ≙ |
|--------------------------------|---------------------------|---------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------------|------|----------------------------|-----------------------------------|
| | | | | | | 1250 | 2500 | | |
| 9040/1510 | 90 | 40 | 1,5 | 1,0 | | X | X | 93% | 0,60 |
| 9040/4010 | 90 | 40 | 4,0 | 1,0 | | X | X | 80% | 1,60 |
| 9040/2015 | 90 | 40 | 2,0 | 1,5 | 3,60 | X | X | 90% | 1,20 |
| 9040/3020 | 90 | 40 | 3,0 | 2,0 | 5,70 | X | X | 85% | 2,40 |
| 9040/3025 | 90 | 40 | 3,0 | 2,5 | | X | X | 85% | 3,00 |
| 9040/4030 | 90 | 40 | 4,0 | 3,0 | 7,70 | X | X | 80% | 4,80 |

aus Kupfer (Materialdicke: 1,0 – 3,0mm / max. Tafelbreite: 2500mm)

| Kurzbezeichnung Bestell-Nr. | Maschen- länge mm L | Maschen- weite mm W (±5%) | Stegbreite mm B (±5%) | Material- dicke mm A (±10%) | Streckgitter- dicke mm D | Streckgitterbreiten (max.) ± 10% | | freier Quer- schnitt | Gewicht Kg/m ² ≙ |
|--------------------------------|---------------------------|---------------------------------|-----------------------------|-----------------------------------|--------------------------------|-------------------------------------|------|----------------------------|-----------------------------------|
| | | | | | | 1250 | 2500 | | |
| 9040/1510 | 90 | 40 | 1,5 | 1,0 | | X | X | 93% | 0,67 |
| 9040/4010 | 90 | 40 | 4,0 | 1,0 | | X | X | 80% | 1,78 |
| 9040/2015 | 90 | 40 | 2,0 | 1,5 | 3,60 | X | X | 90% | 1,34 |
| 9040/3020 | 90 | 40 | 3,0 | 2,0 | 5,70 | X | X | 85% | 2,67 |
| 9040/3025 | 90 | 40 | 3,0 | 2,5 | | X | X | 85% | 3,34 |
| 9040/4030 | 90 | 40 | 4,0 | 3,0 | 7,70 | X | X | 80% | 5,34 |

Alle Angaben unter jeglichen Vorbehalt !!!