


VESMETAL

Masche: (R) 115 x 40

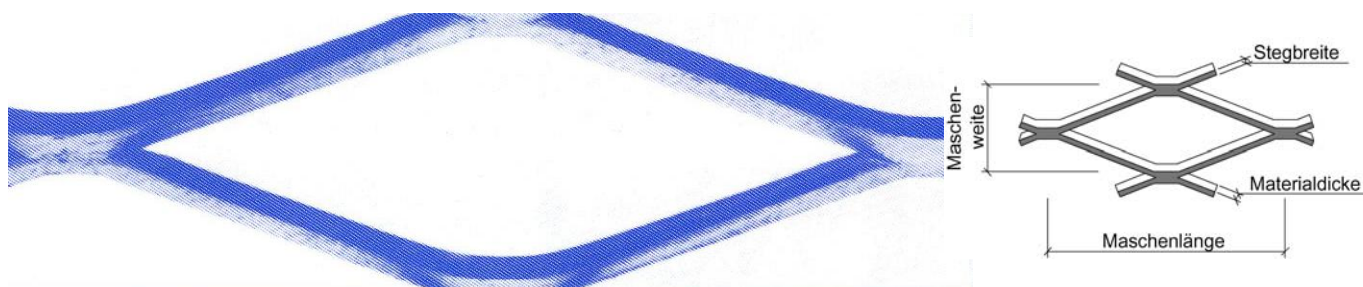

aus Stahlblech (Materialdicke: 1,5 - 5,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
115/3015	115	40	3,0	1,5	6,0	X	X	85%	1,80
115/3020	115	40	3,0	2,0	6,0	X	X	85%	2,40
115/12020	115	40	12,0	2,0		X	X	40%	9,59
115/3030	115	40	3,0	3,0	6,2	X	X	85%	3,60
115/4530	115	40	4,5	3,0	9,0	X	X	77%	5,40
115/7040	115	40	7,0	4,0	13,7	X	X	65%	11,19
115/9040	115	40	8,0	4,0	15,0	X	X	60%	12,80
115/8050	115	40	8,0	5,0	14,8	X	X	60%	16,00
115/12050	115	40	12,0	5,0		X	X	40%	23,96

aus Aluminium (Materialdicke: 1,5 - 6,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
115/3015	115	40	3,0	1,5	6,0	X	X	85%	0,61
115/3020	115	40	3,0	2,0	6,0	X	X	85%	0,81
115/12020	115	40	12,0	2,0		X	X	40%	3,24
115/3030	115	40	3,0	3,0	6,2	X	X	85%	1,22
115/4530	115	40	4,5	3,0	9,0	X	X	77%	1,83
115/7040	115	40	7,0	4,0	13,7	X	X	65%	3,78
115/9040	115	40	8,0	4,0	15,0	X	X	60%	4,32
115/8050	115	40	8,0	5,0	14,8	X	X	60%	5,40
115/12050	115	40	12,0	5,0		X	X	40%	8,09
115/10060	115	40	10,0	6,0		X	X	50%	8,10

aus Edelstahl 1.4301 (Materialdicke: 1,5 – 4,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
115/3015	115	40	3,0	1,5	6,0	X	X	85%	1,80
115/3020	115	40	3,0	2,0	6,0	X	X	85%	2,40
115/12020	115	40	12,0	2,0		X	X	40%	9,59
115/3030	115	40	3,0	3,0	6,2	X	X	85%	3,60
115/4530	115	40	4,5	3,0	9,0	X	X	77%	5,40
115/7040	115	40	7,0	4,0	13,7	X	X	65%	11,19
115/9040	115	40	8,0	4,0	15,0	X	X	60%	12,80

aus Kupfer (Materialdicke: 1,5 – 5,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
115/3015	115	40	3,0	1,5	6,0	X	X	85%	2,01
115/3020	115	40	3,0	2,0	6,0	X	X	85%	2,67
115/12020	115	40	12,0	2,0		X	X	40%	10,66
115/3030	115	40	3,0	3,0	6,2	X	X	85%	4,01
115/4530	115	40	4,5	3,0	9,0	X	X	77%	6,00
115/7040	115	40	7,0	4,0	13,7	X	X	65%	11,19
115/8050	115	40	8,0	5,0	14,8	X	X	60%	16,00

Alle Angaben unter jeglichen Vorbehalt !!!