


# VESMETAL

**Masche: (R) 137 x 50**

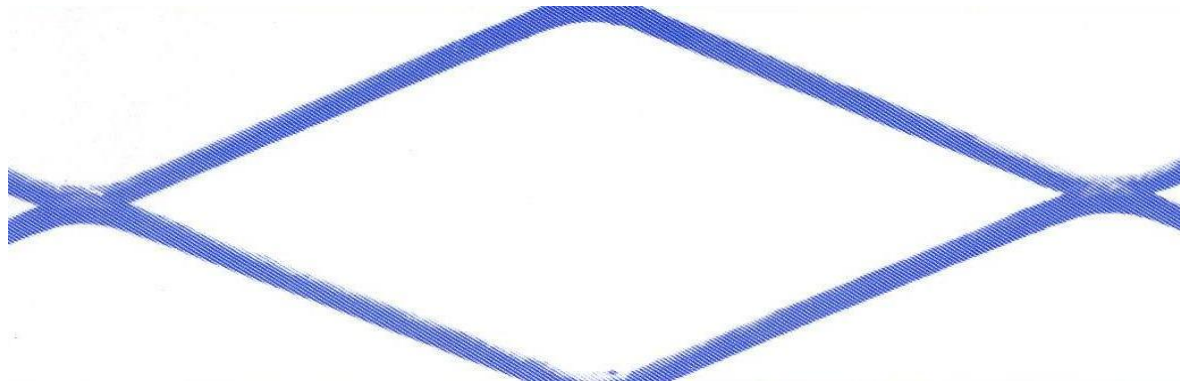

aus Stahlblech (Materialdicke: 2,5 - 6,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
13750/3030	137	50	3,0	3,0	6,0	X	X	88%	2,88
13750/4530	137	50	4,5	3,0	9,0	X	X	82%	4,32
13750/6030	137	50	6,0	3,0	12,0	X	X	76%	5,76
13750/6040	137	50	6,0	4,0	13,0	X	X	76%	7,68
13750/8050	137	50	8,0	5,0	14,0	X	X	68%	12,78
13750/8060	137	50	8,0	6,0	17,0	X	X	68%	15,34
13750/12060	137	50	12,0	6,0		X	X	52%	22,97

aus Aluminium (Materialdicke: 2,5 - 6,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
13750/3030	137	50	3,0	3,0	6,0	X	X	88%	0,98
13750/4530	137	50	4,5	3,0	9,0	X	X	82%	1,46
13750/6030	137	50	6,0	3,0	12,0	X	X	76%	1,95
13750/6040	137	50	6,0	4,0	13,0	X	X	76%	2,56
13750/8050	137	50	8,0	5,0	14,0	X	X	68%	4,32
13750/8060	137	50	8,0	6,0	17,0	X	X	68%	5,18
13750/12060	137	50	12,0	6,0		X	X	52%	7,76

aus Edelstahl 1.4301 (Materialdicke: 2,5 – 4,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
13750/3030	137	50	3,0	3,0	6,0	X	X	88%	2,88
13750/4530	137	50	4,5	3,0	9,0	X	X	82%	4,32
13750/6030	137	50	6,0	3,0	12,0	X	X	76%	5,76
13750/6040	137	50	6,0	4,0	13,0	X	X	76%	7,68

aus Kupfer (Materialdicke: 2,5 – 5,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
13750/3030	137	50	3,0	3,0	6,0	X	X	88%	3,21
13750/4530	137	50	4,5	3,0	9,0	X	X	82%	4,81
13750/6030	137	50	6,0	3,0	12,0	X	X	76%	6,41
13750/6040	137	50	6,0	4,0	13,0	X	X	76%	7,68
13750/8050	137	50	8,0	5,0	14,0	X	X	68%	12,78

Alle Angaben unter jeglichen Vorbehalt !!!