
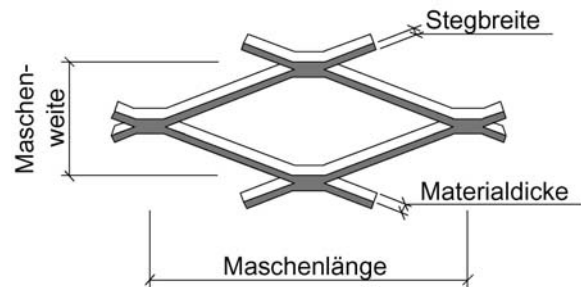


VESMETAL

Masche: (R) 42 x 13

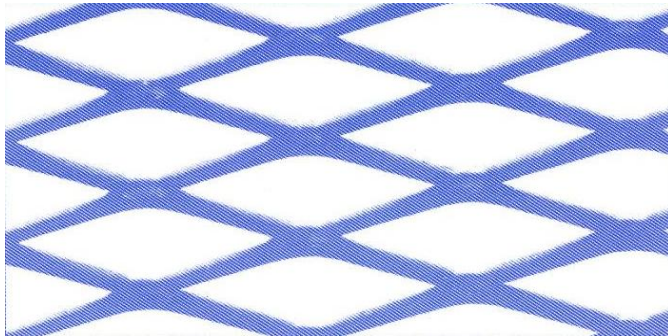

aus Stahlblech (Materialdicke: 0,7 - 3,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	2500		
4213/1507	42	13	1,5	0,70		X	X	77%	1,30
4213/2510	42	13	2,5	1,00		X	X	62%	3,08
4213/17125	42	13	1,7	1,25		X	X	74%	2,62
4213/2015	42	13	2,0	1,50		X	X	69%	3,70
4213/2515	42	13	2,5	1,50		X	X	62%	4,62
4213/2520	42	13	2,5	2,00		X	X	62%	6,16
4213/3020	42	13	3,0	2,00	5,5	X	X	54%	7,38
4213/4530	42	13	4,5	3,00		X	X	31%	16,56

aus Aluminium (Materialdicke: 1,0 - 4,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	2500		
4213/1510	42	13	1,5	1,00		X	X	77%	0,63
4213/2510	42	13	2,5	1,00		X	X	62%	1,04
4213/17125	42	13	1,7	1,25		X	X	74%	0,89
4213/2015	42	13	2,0	1,50		X	X	69%	1,25
4213/2515	42	13	2,5	1,50		X	X	62%	1,56
4213/2520	42	13	2,5	2,00		X	X	62%	2,08
4213/3020	42	13	3,0	2,00	5,5	X	X	54%	2,49
4213/4530	42	13	4,5	3,00		X	X	31%	5,59
4213/4040	42	13	4,0	4,00		X	X	39%	6,63
4213/5040	42	13	5,0	4,00		X	X	23%	8,31

aus Edelstahl 1.4301 (Materialdicke: 0,7 – 2,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	2500		
4213/1507	42	13	1,5	0,70		X	X	77%	1,30
4213/2510	42	13	2,5	1,00		X	X	62%	3,08
4213/2015	42	13	2,0	1,50		X	X	69%	3,70
4213/3020	42	13	3,0	2,00	5,5	X	X	54%	7,38

aus Kupfer (Materialdicke: 0,55 – 2,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	2500		
4213/15055	42	13	1,5	0,55		X	X	77%	1,13
4213/2510	42	13	2,5	1,00		X	X	62%	3,43
4213/2015	42	13	2,0	1,50		X	X	69%	4,11
4213/2520	42	13	2,5	2,00		X	X	62%	6,85
4213/3020	42	13	3,0	2,00	5,5	X	X	54%	8,21
4213/4530	42	13	4,5	2,00		X	X	31%	12,28

Alle Angaben unter jeglichen Vorbehalt !!!