
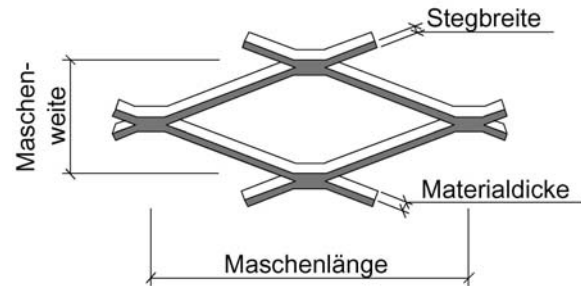


VESMETAL

Masche: (R) 28 x 10

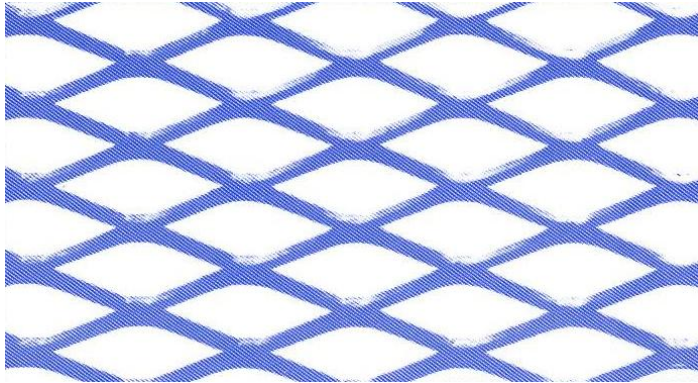

aus Stahlblech (Materialdicke: 0,7 - 2,0mm / max. Tafelbreite: 1500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	1500		
2810/1007	28	10	1,5	0,7		X	X	70%	1,68
2810/2010	28	10	2,0	1,0	3,6	X	X	60%	4,80
2810/2510	28	10	2,5	1,0	4,1	X	X	50%	4,00
2810/2515	28	10	2,5	1,5	4,4	X	X	50%	6,00
2810/3015	28	10	3,0	1,5		X	X	40%	7,19
2810/2520	28	10	2,5	2,0		X	X	50%	8,00
2810/3020	28	10	3,0	2,0	5,4	X	X	40%	9,59

aus Aluminium (Materialdicke: 0,8 - 3,0mm / max. Tafelbreite: 1500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	1500		
2810/1505	28	10	1,5	0,8		X	X	70%	0,65
2810/1508	28	10	1,5	1,0		X	X	70%	0,81
2810/2010	28	10	2,0	1,0	3,6	X	X	60%	1,62
2810/2510	28	10	2,5	1,0	4,1	X	X	50%	1,35
2810/2515	28	10	2,5	1,5	4,4	X	X	50%	2,03
2810/3015	28	10	3,0	1,5		X	X	40%	2,43
2810/2520	28	10	2,5	2,0		X	X	50%	2,70
2810/3020	28	10	3,0	2,0	5,4	X	X	40%	3,24
2810/4030	28	10	4,0	3,0		X	X	20%	6,48

aus Edelstahl 1.4301 (Materialdicke: 0,5 - 1,25mm / max. Tafelbreite: 1500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	1500		
2810/1505	28	10	1,5	0,50		X	X	70%	1,20
2810/1508	28	10	1,5	0,80		X	X	70%	1,92
2810/2010	28	10	2,0	1,00	3,6	X	X	60%	3,20
2810/2510	28	10	2,5	1,00	4,1	X	X	50%	4,00
2810/25125	28	10	2,0	1,25		X	X	60%	4,00
2810/25125	28	10	2,5	1,25		X	X	50%	5,00

aus Kupfer (Materialdicke: 0,55 - 1,5mm / max. Tafelbreite: 1500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	1500		
2810/15055	28	10	1,5	0,55		X	X	70%	1,47
2810/1508	28	10	1,5	0,80		X	X	70%	2,14
2810/2010	28	10	2,0	1,00	3,6	X	X	60%	3,56
2810/2510	28	10	2,5	1,00	4,1	X	X	50%	4,45
2810/2015	28	10	2,0	1,50		X	X	60%	5,34
2810/2515	28	10	2,5	1,50	4,4	X	X	50%	6,68

Alle Angaben unter jeglichen Vorbehalt !!!