
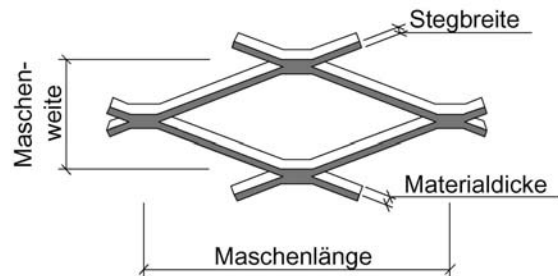


# VESMETAL

## Masche: (R) 28 x 12

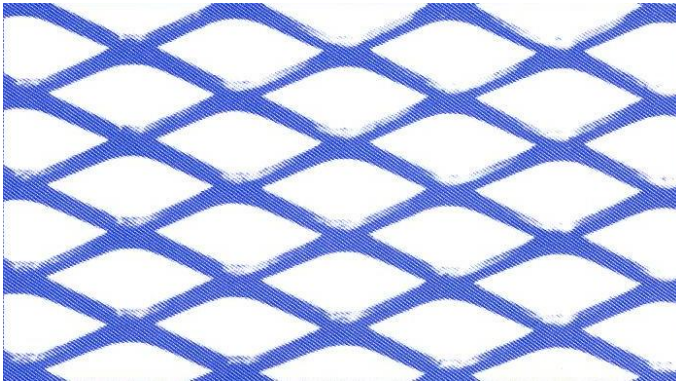

aus Stahlblech (Materialdicke: 0,7 - 2,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1000	2500		
2812/1007	28	12	1,5	0,7		X	X	75%	1,40
2812/2010	28	12	2,0	1,0	3,8	X	X	67%	2,67
2812/2510	28	12	2,5	1,0	4,0	X	X	58%	3,34
2812/1515	28	12	1,5	1,5	3,7	X	X	75%	3,00
2812/2515	28	12	2,5	1,5		X	X	58%	5,00
2812/3015	28	12	3,0	1,5		X	X	50%	6,00
2812/2520	28	12	2,5	2,0		X	X	58%	6,67
2812/3020	28	12	3,0	2,0	5,8	X	X	50%	8,00

aus Aluminium (Materialdicke: 0,8 - 3,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1000	2500		
2812/1505	28	12	1,5	0,8		X	X	75%	0,54
2812/1508	28	12	1,5	1,0		X	X	75%	0,68
2812/2010	28	12	2,0	1,0	3,8	X	X	67%	0,90
2812/2510	28	12	2,5	1,0	4,0	X	X	58%	1,13
2812/1515	28	12	1,5	1,5	3,7	X	X	75%	1,02
2812/2515	28	12	2,5	1,5		X	X	58%	1,69
2812/3015	28	12	3,0	1,5		X	X	50%	2,03
2812/2520	28	12	2,5	2,0		X	X	58%	2,25
2812/3020	28	12	3,0	2,0	5,8	X	X	50%	2,70
2812/4030	28	12	4,0	3,0		X	X	33%	5,40

aus Edelstahl 1.4301 (Materialdicke: 0,5 - 1,25mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
2812/1505	28	12	1,5	0,50		X	X	75%	1,00
2812/2508	28	12	1,5	0,80		X	X	75%	1,60
2812/2010	28	12	2,0	1,00	3,8	X	X	67%	2,67
2812/2510	28	12	2,5	1,00	4,0	X	X	58%	3,34
2812/25125	28	12	2,0	1,25		X	X	67%	3,34

aus Kupfer (Materialdicke: 0,55 - 1,5mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
2812/15055	28	12	1,5	0,55		X	X	75%	1,23
2812/1508	28	12	1,5	0,80		X	X	75%	1,78
2812/2010	28	12	2,0	1,00	3,8	X	X	67%	2,97
2812/1515	28	12	1,5	1,50	3,7	X	X	75%	3,34
2812/2015	28	12	2,0	1,50		X	X	67%	4,45
2812/2515	28	12	2,5	1,50		X	X	58%	5,57

Alle Angaben unter jeglichen Vorbehalt !!!