
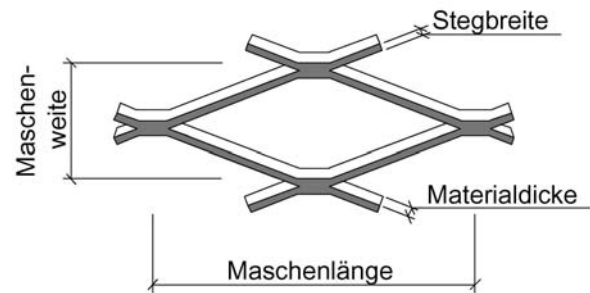


VESMETAL

Masche: (R) 30 x 13

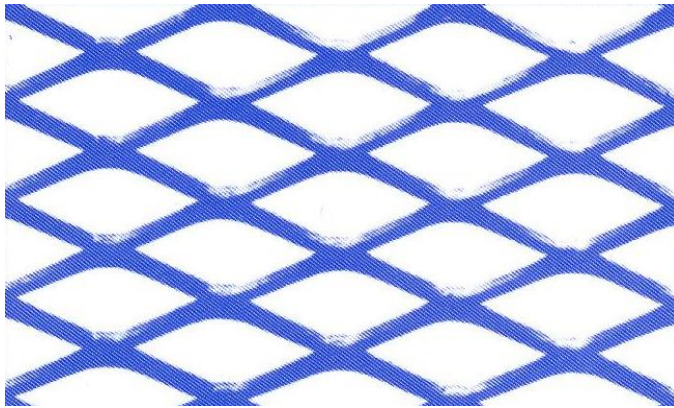

aus Stahlblech (Materialdicke: 0,7 - 2,0mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
3013/1507	30	13	1,5	0,7		X	X	77%	1,30
3013/1510	30	13	1,5	1,0		X	X	77%	1,85
3013/1515	30	13	1,5	1,5		X	X	77%	2,77
3013/2015	30	13	2,0	1,5	3,7	X	X	69%	3,70
3013/2515	30	13	2,5	1,5		X	X	62%	4,62
3013/2520	30	13	2,5	2,0	4,8	X	X	62%	6,16
3013/3020	30	13	3,0	2,0		X	X	54%	7,38

aus Aluminium (Materialdicke: 0,8 – 2,5mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
3013/1508	30	13	1,5	0,8		X	X	77%	0,50
3013/1510	30	13	1,5	1,0		X	X	77%	0,63
3013/1515	30	13	1,5	1,5		X	X	77%	0,94
3013/2015	30	13	2,0	1,5	3,7	X	X	69%	1,25
3013/2515	30	13	2,5	1,5		X	X	62%	1,56
3013/2520	30	13	2,5	2,0	4,8	X	X	62%	2,08
3013/3020	30	13	3,0	2,0		X	X	54%	2,49
3013/3025	30	13	3,0	2,5		X	X	54%	3,12
3013/4025	30	13	4,0	2,5		X	X	39%	4,15

aus Edelstahl 1.4301 (Materialdicke: 0,5 - 1,25mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
3013/1507	30	13	1,5	0,7		X	X	77%	1,30
3013/1510	30	13	1,5	1,0		X	X	77%	1,85
3013/2510	30	13	2,5	1,0		X	X	62%	3,08
3013/15125	30	13	1,5	1,25		X	X	77%	2,31
3013/20125	30	13	2,0	1,25		X	X	69%	3,08
3013/30125	30	13	3,0	1,25		X	X	54%	4,61

aus Kupfer (Materialdicke: 0,55 - 1,5mm / max. Tafelbreite: 1250mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1000	1250		
3013/15055	30	13	1,5	0,55		X	X	77%	1,13
3013/1507	30	13	1,5	0,7		X	X	77%	1,44
3013/1510	30	13	1,5	1,0		X	X	77%	2,06
3013/1515	30	13	1,5	1,5		X	X	77%	3,08
3013/2015	30	13	2,0	1,5	3,7	X	X	69%	4,11
3013/2515	30	13	2,5	1,5	4,8	X	X	62%	5,14

Alle Angaben unter jeglichen Vorbehalt !!!