
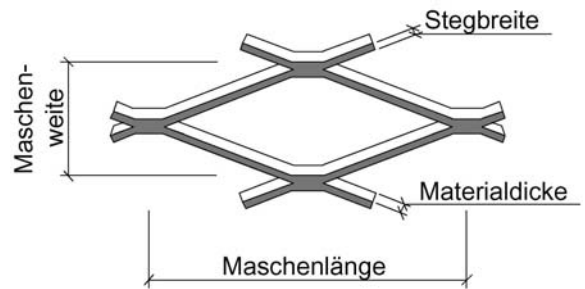


# VESMETAL

## Masche: (R) 42 x 15

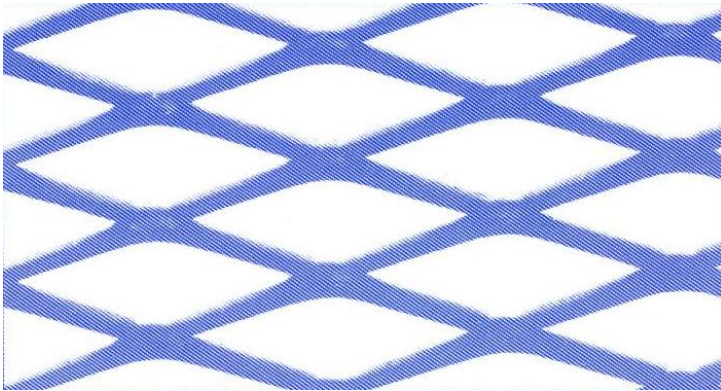

### aus Stahlblech (Materialdicke: 0,8 - 3,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2000		
4215/1508	42	15	1,5	0,80		X	X	80%	1,28
4215/1510	42	15	1,5	1,00	1,0	X	X	80%	1,60
4215/17125	42	15	1,7	1,25	3,2	X	X	77%	2,27
4215/2015	42	15	2,0	1,50	3,7	X	X	73%	3,20
4215/2515	42	15	2,5	1,50		X	X	67%	4,00
4215/2520	42	15	2,5	2,00	4,7	X	X	67%	5,34
4215/3020	42	15	3,0	2,00		X	X	60%	6,40
4215/5030	42	15	5,0	3,00		X	X	33%	16,00

### aus Aluminium (Materialdicke: 1,0 - 4,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2000		
4215/1510	42	15	1,5	1,00	1,0	X	X	80%	0,54
4215/17125	42	15	1,7	1,25	3,2	X	X	77%	0,77
4215/2015	42	15	2,0	1,50	3,7	X	X	73%	1,08
4215/2515	42	15	2,5	1,50		X	X	67%	1,35
4215/2520	42	15	2,5	2,00	4,7	X	X	67%	1,80
4215/3020	42	15	3,0	2,00		X	X	60%	2,16
4215/5020	42	15	5,0	2,00		X	X	33%	3,60
4215/5025	42	15	5,0	2,50		X	X	33%	4,50
4215/5030	42	15	5,0	3,00		X	X	33%	5,40
4215/6040	42	15	6,0	4,00		X	X	20%	8,64

### aus Edelstahl 1.4301 (Materialdicke: 0,8 – 2,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2000		
4215/1508	42	15	1,5	0,80		X	X	80%	1,28
4215/17125	42	15	1,7	1,25	3,2	X	X	77%	2,27
4215/2015	42	15	2,0	1,50	3,7	X	X	73%	3,20
4215/2520	42	15	2,5	2,00	4,7	X	X	67%	5,34

### aus Kupfer (Materialdicke: 0,55 – 3,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2000		
4215/15055	42	15	1,5	0,55		X	X	80%	0,98
4215/20055	42	15	2,0	0,55		X	X	73%	1,31
4215/17125	42	15	1,7	1,25	3,2	X	X	77%	2,52
4215/2015	42	15	2,0	1,50	3,7	X	X	73%	3,56
4215/2520	42	15	2,5	2,00	4,7	X	X	67%	5,94
4215/3030	42	15	3,0	3,00		X	X	60%	10,68

Alle Angaben unter jeglichen Vorbehalt !!!