
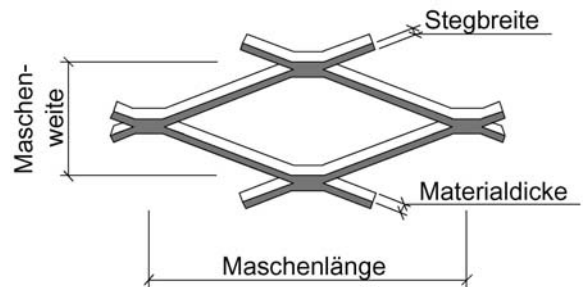


VESMETAL

Masche: (R) 42 x 20

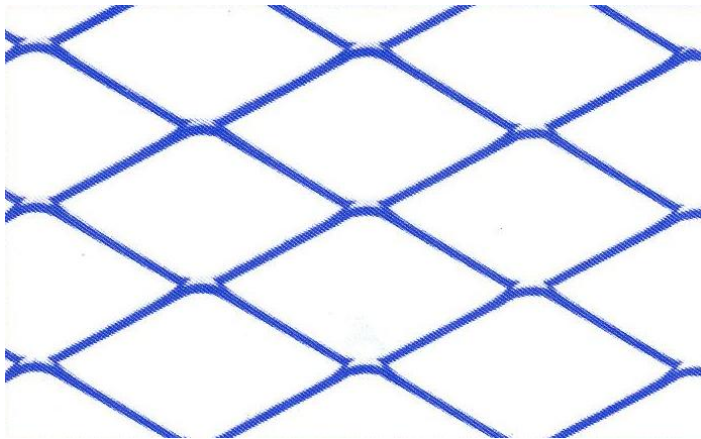

aus Stahlblech (Materialdicke: 0,8 - 3,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
4220/1508	42	20	1,5	0,80		X	X	85%	0,96
4220/15125	42	20	1,5	1,25	2,7	X	X	85%	1,50
4220/1515	42	20	1,5	1,50	2,7	X	X	85%	1,80
4220/2015	42	20	2,0	1,50	3,7	X	X	80%	2,40
4220/2515	42	20	2,5	1,50		X	X	75%	3,00
4220/2520	42	20	2,5	2,00	4,7	X	X	75%	4,00
4220/3020	42	20	3,0	2,00		X	X	70%	4,80
4220/5030	42	20	5,0	3,00		X	X	50%	12,00

aus Aluminium (Materialdicke: 1,0 - 4,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
4220/1510	42	20	1,5	1,0		X	X	85%	0,41
4220/1515	42	20	1,5	1,5	2,7	X	X	85%	0,61
4220/2015	42	20	2,0	1,5	3,7	X	X	80%	0,81
4220/2515	42	20	2,5	1,5		X	X	75%	1,02
4220/2520	42	20	2,5	2,0	4,7	X	X	75%	1,35
4220/3020	42	20	3,0	2,0		X	X	70%	1,62
4220/8520	42	20	8,5	2,0		X	X	15%	4,58
4220/9020	42	20	9,0	2,0		X	X	11%	4,83
4220/5030	42	20	5,0	3,0		X	X	50%	4,05
4220/6040	42	20	6,0	4,0		X	X	40%	6,47

aus Edelstahl 1.4301 (Materialdicke: 0,8 - 1,5mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
4220/1508	42	20	1,5	0,80		X	X	85%	0,96
4220/15125	42	20	1,5	1,25	2,7	X	X	85%	1,50
4220/1515	42	20	1,5	1,50	2,7	X	X	85%	1,80
4220/2015	42	20	2,0	1,50	3,7	X	X	80%	2,40

aus Kupfer (Materialdicke: 0,55 – 3,0mm / max. Tafelbreite: 2000mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2000		
4220/15055	42	20	1,5	0,55		X	X	85%	0,74
4220/20055	42	20	2,0	0,55		X	X	80%	0,98
4220/2010	42	20	2,0	1,00		X	X	80%	1,78
4220/2015	42	20	2,0	1,50	3,7	X	X	80%	2,67
4220/2520	42	20	2,5	2,00	4,7	X	X	75%	4,45
4220/3030	42	20	3,0	3,00		X	X	70%	8,00

Alle Angaben unter jeglichen Vorbehalt !!!