
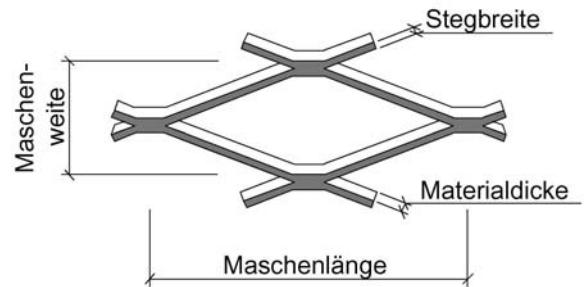


VESMETAL

Masche: (R) 62 x 25

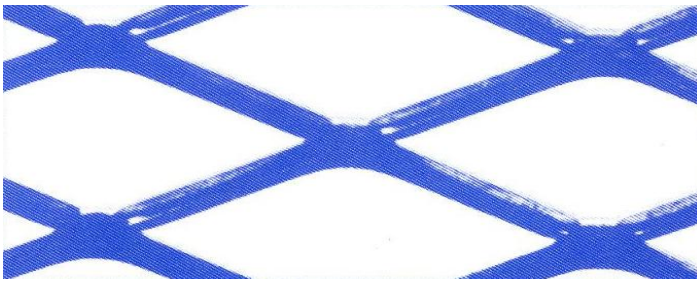

aus Stahlblech (Materialdicke: 1,0 - 4,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
6225/2510	62	25	2,5	1,0	4,8	X	X	80%	1,60
6225/2520	62	25	2,5	2,0	5,0	X	X	80%	3,20
6225/4020	62	25	4,0	2,0		X	X	68%	5,12
6225/3030	62	25	3,0	3,0	6,4	X	X	76%	5,76
6225/4530	62	25	4,5	3,0	9,0	X	X	64%	8,64
6225/9030	62	25	9,0	3,0		X	X	28%	17,27
6225/4040	62	25	4,0	4,0	8,0	X	X	68%	10,23
6225/6040	62	25	6,0	4,0		X	X	52%	15,32
6225/9040	62	25	9,0	4,0	14,0	X	X	28%	23,03

aus Aluminium (Materialdicke: 1,0 - 5,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
6225/2510	62	25	2,5	1,0	4,8	X	X	80%	0,54
6225/2520	62	25	2,5	2,0	5,0	X	X	80%	1,08
6225/4020	62	25	4,0	2,0		X	X	68%	1,73
6225/3030	62	25	3,0	3,0	6,4	X	X	76%	1,95
6225/4530	62	25	4,5	3,0	9,0	X	X	64%	2,92
6225/9030	62	25	9,0	3,0		X	X	28%	5,83
6225/4040	62	25	4,0	4,0	8,0	X	X	68%	3,46
6225/6040	62	25	6,0	4,0		X	X	52%	5,17
6225/9040	62	25	9,0	4,0	14,0	X	X	28%	7,77
6225/8050	62	25	8,0	5,0		X	X	36%	8,60

aus Edelstahl 1.4301 (Materialdicke: 1,0 – 3,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
6225/2510	62	25	2,5	1,0	4,8	X	X	80%	1,60
6225/2520	62	25	2,5	2,0	5,0	X	X	80%	3,20
6225/4020	62	25	4,0	2,0		X	X	68%	5,12
6225/3030	62	25	3,0	3,0	6,4	X	X	76%	5,76
6225/4530	62	25	4,5	3,0	9,0	X	X	64%	8,64
6225/9030	62	25	9,0	3,0		X	X	28%	17,27

aus Kupfer (Materialdicke: 1,0 – 3,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
6225/2510	62	25	2,5	1,0	4,8	X	X	80%	1,78
6225/2520	62	25	2,5	2,0	5,0	X	X	80%	3,56
6225/4020	62	25	4,0	2,0		X	X	68%	5,69
6225/3030	62	25	3,0	3,0	6,4	X	X	76%	6,41
6225/4530	62	25	4,5	3,0	9,0	X	X	64%	9,61
6225/9030	62	25	9,0	3,0		X	X	28%	19,21

Alle Angaben unter jeglichen Vorbehalt !!!