
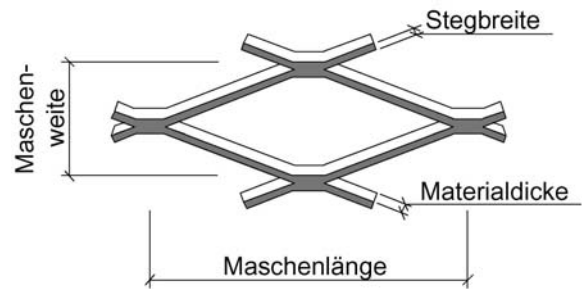


# VESMETAL

## Masche: (R) 66 x 23

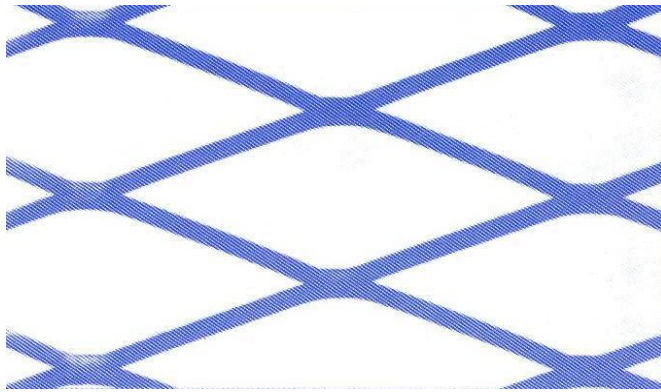

aus Stahlblech (Materialdicke: 1,0 - 5,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
6623/2510	66	23	2,5	1,0	4,8	X	X	78%	1,74
6623/2020	66	23	2,0	2,0	5,0	X	X	83%	2,79
6623/3030	66	23	3,0	3,0	6,7	X	X	74%	6,25
6623/4530	66	23	4,5	3,0	8,5	X	X	61%	9,38
6623/6030	66	23	6,0	3,0	11,0	X	X	48%	12,50
6623/7030	66	23	7,0	3,0	13,3	X	X	39%	14,55
6623/4540	66	23	4,5	4,0	12,0	X	X	61%	12,50
6623/7050	66	23	7,0	5,0	15,0	X		39%	24,25

aus Aluminium (Materialdicke: 1,0 - 6,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
6623/2510	66	23	2,5	1,0	4,8	X	X	78%	0,59
6623/2020	66	23	2,0	2,0	5,0	X	X	83%	0,94
6623/3030	66	23	3,0	3,0	6,7	X	X	74%	2,11
6623/4530	66	23	4,5	3,0	8,5	X	X	61%	3,17
6623/6030	66	23	6,0	3,0	11,0	X	X	48%	4,22
6623/7030	66	23	7,0	3,0	13,3	X	X	39%	4,91
6623/4540	66	23	4,5	4,0	12,0	X	X	61%	4,22
6623/7050	66	23	7,0	5,0	15,0	X		39%	8,19
6623/9050	66	23	9,0	5,0		X		22%	10,55
6623/8060	66	23	8,0	6,0		X		31%	11,25

aus Edelstahl 1.4301 (Materialdicke: 1,0 – 3,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
6623/2510	66	23	2,5	1,0	4,8	X	X	78%	1,74
6623/2020	66	23	2,0	2,0	5,0	X	X	83%	2,79
6623/3030	66	23	3,0	3,0	6,7	X	X	74%	6,25
6623/4530	66	23	4,5	3,0	8,5	X	X	61%	9,38
6623/6030	66	23	6,0	3,0	11,0	X	X	48%	12,50
6623/7030	66	23	7,0	3,0	13,3	X	X	39%	14,55

aus Kupfer (Materialdicke: 1,0 – 4,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m <sup>2</sup> ≙
						1250	2500		
6623/2510	66	23	2,5	1,0	4,8	X	X	78%	1,94
6623/2020	66	23	2,0	2,0	5,0	X	X	83%	3,10
6623/3030	66	23	3,0	3,0	6,7	X	X	74%	6,96
6623/4530	66	23	4,5	3,0	8,5	X	X	61%	10,43
6623/7030	66	23	7,0	3,0	13,3	X	X	39%	16,19
6623/4540	66	23	4,5	4,0	12,0	X	X	61%	13,91

Alle Angaben unter jeglichen Vorbehalt !!!